

globe valves

Control 3-point
Nominal stroke 32 mm

Actuating force 2000 N
Nominal voltage AC 230 V

Globe valve actuator with emergency control function for 2-way and 3-way

· Design life SuperCaps: 15 years

# **Technical data sheet**



# **Technical data**

Electrical data	Nominal voltage	AC 230 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 85265 V
	Power consumption in operation	3.5 W
	Power consumption in rest position	1.5 W
	Power consumption for wire sizing	6.5 VA
	Connection supply / control	Cable 1 m, 4 x 0.75 mm <sup>2</sup>
	Parallel operation	Yes (note the performance data)
Functional data	· · · ·	
Functional data	Actuating force motor	2000 N
	Setting emergency setting position (POP)	Actuator spindle retracted / extended,
	Manual override	adjustable (POP rotary button) with push-button
	Nominal stroke	•
		32 mm 150 s / 32 mm
	Actuating time motor	35 s / 32 mm
	Actuating time emergency control function	35 \$7 32 mm
	Sound power level motor	60 dB(A)
	Sound power level emergency control position	60 dB(A)
	Position indication	Mechanically, 532 mm stroke
Safety	Protection class IEC/EN	Il reinforced insulation
-	Protection class UL	UL Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2014/30/EU
	Low voltage directive	CE according to 2014/35/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Certification UL	cULus according to UL 60730-1A, UL 60730-2- 14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1.AA
	Rated impulse voltage supply / control	4 kV
	Control pollution degree	3
	Ambient temperature	050°C
	Non-operating temperature	-4080°C
	Ambient humidity	95% r.h., non-condensing
	Maintenance	Maintenance-free
Weight	Weight	7.6 kg
Terms	Abbreviations	POP = Power off position / emergency setting position CPO = Controlled power off / controlled emergency control function PF = Power fail delay time / bridging time

## Safety notes



• This device has been designed for use in stationary heating, ventilation and air conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.



Safety notes			
	<ul> <li>Outdoor application: only possible in case that no (sea)water, snow, ice, insolation or aggressive gases interfere directly with the actuator and that is ensured that the ambient conditions remain at any time within the thresholds according to the data sheet.</li> <li>Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.</li> <li>The switch for changing the direction of motion and so the closing point may be adjusted only by authorised specialists. The direction of motion is critical, particularly in connection with frost protection circuits.</li> <li>The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.</li> <li>The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.</li> </ul>		
Product features			
Mode of operation	The actuator moves the valve to the desired operating position at the same time as the integrated capacitors are loaded. Interrupting the supply voltage causes the valve to be moved to the selected emergency setting position (POP) by means of stored electrical energy.		
Pre-charging time (start up)	The capacitor actuators require a pre-charging time. This time is used for charging the capacitors up to a usable voltage level. This ensures that, in the event of an electricity interruption, the actuator can move at any time from its current position into the preset emergency setting position (POP). The duration of the pre-charging time depends mainly on how long the power was interrupted. Typical pre-charging time $ \begin{array}{c} 30 \\ [s] \\ 25 \\ 20 \\ 15 \\ 10 \\ 15 \\ 10 \\ 10 \\ 5 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10$		
[d] = Electricity interruption in days [s] = Pre-charging time in seconds <b>Delivery condition (capacitors)</b>			
Installation on third-party valves	The retrofit actuators for installation on a wide range of valves from various manufacturers are comprised of an actuator, universal valve neck adapter and universal valve stem adapter. Adapt the valve neck and valve stem to begin with, then attach the retrofit actuator to the valve neck adapter, connect to the valve and start up. The valve neck adapter/actuator can be rotated through 360° on the valve neck, provided it is permitted by the size of the installed valve.		
Installation on Belimo valves	Use standard actuators from Belimo for mounting on Belimo globe valves. The installation of retrofit actuators on Belimo globe valves is technically possible.		

AVK230A-3-RE




Product features		
Manual override	Manual control with push-button possible - temporary. The gear is disengaged and th actuator decoupled for as long as the button is pressed. The stroke can be adjusted by using a hexagon socket screw key (5 mm), which is inserted into the top of the actuator. The stroke spindle extends when the key is rotated clockwise.	
High functional reliability	High functional reliability The actuator is overload protected, requires no limit switches and automatica when the end stop is reached.	
Position indication	The stroke is indicated mechanically on the bracket with tabs. The stroke range adjusts itself automatically during operation.	
Home position	Factory setting: Actuator spindle is retracted.	
Direction of stroke switch	When actuated, the direction of stroke switch changes the running direction in normal operation. The direction of stroke switch has no influence on the emergency setting position (POP) which has been set.	
Emergency setting position (POP) rotary knob		
Accessories		
	Description	Туре
Electrical accessories	Auxiliary switch, 2 x SPDT, add-on, grey	S2A-H
Electrical installation		
∧ Notes	Caution: Power supply voltage!	

Δ	Notes	<ul> <li>Caution: Power supply voltage!</li> </ul>
$\triangle$		<ul><li>Parallel connection of other actuators possible. Observe the performance data.</li><li>Direction of stroke switch factory setting: Actuator spindle retracted.</li></ul>

## Wiring diagrams

AC 230 V, 3-point



		(B)	
а	b	<b>V</b>	S.
<u>_</u> L	$\langle \cdot \rangle$	↓	<b>≜</b>
<b>/</b> -	/-	—	—
<b>/</b> -	Ľ	1	+
Ł	_/L	↓	<b>†</b>

Cable colours:
1 = black
2 = red


3 = white

4 = white

# AVK230A-3-RE



# **Operating controls and indicators**

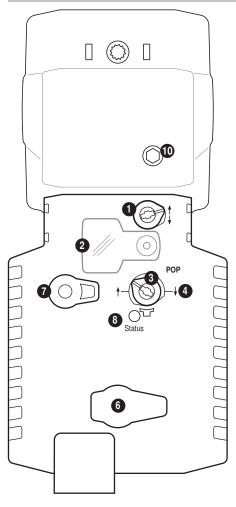

- **1** Direction of stroke switch
  - Switch over: Direction of stroke changes
- 2 Cover, POP button
- **3** POP button
- 4 Scale for manual adjustment
- 6 (No function)

#### 7 Gear disengagement button


Press button: Gear disengaged, motor stops, manual operation possible Release button: Gear engaged, standard mode

LED display	Meaning / function
On	Operation OK
Flashing	POP function active
Off	<ul> <li>Not in operation</li> <li>Pre-charging time SuperCap</li> <li>Fault SuperCap</li> </ul>

### Manual override

Clockwise: Actuator spindle extends Counterclockwise: Actuator spindle retracts


Setting emergency setting position (POP)

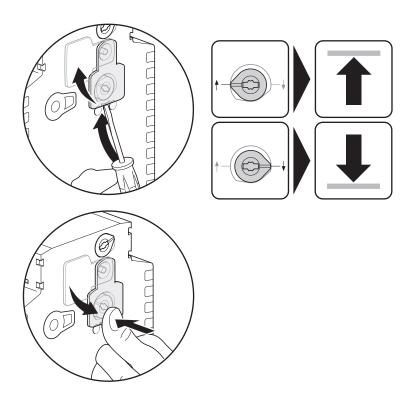



## **Dimensions** [mm]

**Dimensional drawings** 

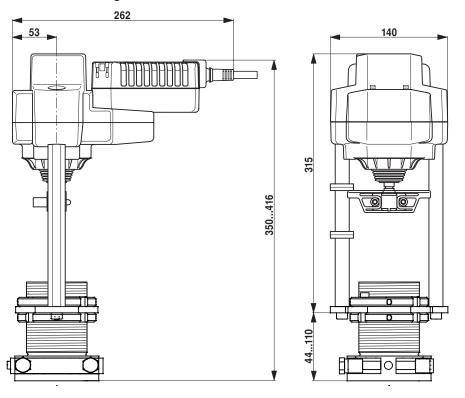

# **Further documentation**

· Installation instructions for actuators